

# Automatic Shower Controls SLS 02, SLS 02T



SLS 02




SLS 02T

## Characteristics:

- system reacts to the user attendance in front of the sensor, minimum stay time in active range is 2 seconds
- water is flowing as long as an user is in the active range
- water stops after user leaving the active range (adjustable time delay 0,25 - 7,75 sec.)
- possibility of changing of time delay, active range and switching off by SLD 03
- function of automatic water stop after 5 minut of continuous flow
- SLS 02 is destined for cold and hot water, temperature is regulated by mixer
- SLS 02T is destined for cold and hot water, temperature is regulated by thermostatic mixer, pressure of hot and cold water must be the same
- safety fuse against scalding
- monitoring of battery capacity (only for models with „B“ index)

## Installation Drawing:

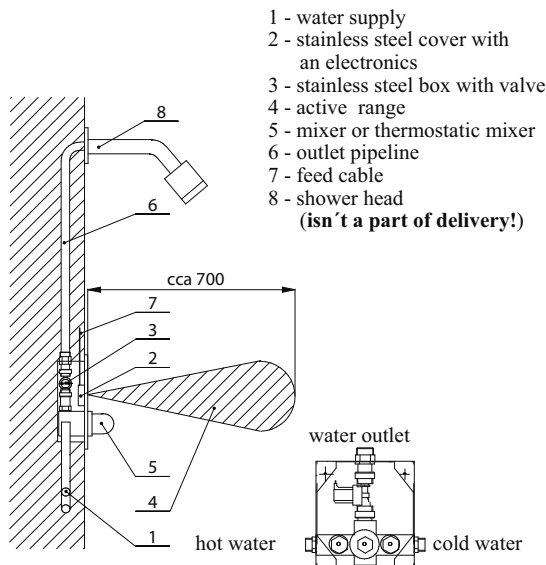

## Technical Specification:

Dimension of stainless steel cover	170 x 170 x 10 mm
Dimension of plastic mounting box	150 x 160 x 65 mm
Operating voltage	
- SLS 02, SLS 02T	24V DC external
- SLS 02B, SLS 02TB	battery 9V
Power input	
- operating by 24V DC	5 W
- operating by 9V	1,4 W
Active range	0,3 - 0,7 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 3/4"
Water outlet	male thread G 3/4"

## Supply Specification:

- SLS 02** – **supply No. 02020** stainless steel stamped cover with an integrated electronics; stainless steel mounting box
- SLS 02B** – **supply No. 02026** with a brass screw-coupling, integrated mixer and electromagnetic valve (1 pc.); mounting set; lithium battery SLA 09 (only for models with „B“ index)
- SLS 02T** – **supply No. 02023** stainless steel stamped cover with an integrated electronics; stainless steel mounting box
- SLS 02TB** – **supply No. 02027** with a brass screw-coupling, integrated thermostatic mixer and electromagnetic valve (1 pc.); mounting set, lithium battery SLA09 (only for models with „B“ index)

## Recommended Accessories:

- SLZ 01Y** – **supply No. 05012** external power supply 230/24V DC for operating of max. 2 pcs. of shower controls (see page 118)
- SLZ 01Z** – **supply No. 05011** external power supply 230/24V DC for operating of max. 4 pcs. of shower controls (see page 118)
- SLZ 03** – **supply No. 05030** switched power supply 230/24V DC for operating of max. 9 pcs. of shower controls (see page 118)
- SLZ 06** – **supply No. 05060** external power supply 230/24V DC for operating of max. 1 pc. of shower control (see page 118)
- SLD 03** – **supply No. 07030** universal remote control for an adjustment of parameters of all products with infra-red electronics (see page 115)
- SLA 09** – **supply No. 06090** lithium battery 9V/1200 mAh, type U9VL, battery life approx. 2 years at 100 uses per day (only for models with „B“ index) (see page 115)
- SLA 17** – **supply No. 06170** stainless steel vandal-proof shower head (see page 115)
- SLA 28** – **supply No. 06280** shower head (see page 115)