


Automatic Wall-mounted Tap SLU 14, SLU 14X



SLU 14

Installation Drawing:

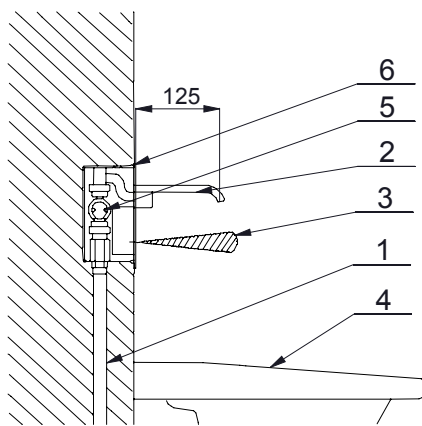

- 1 - water supply
- 2 - spout 125 mm
- 3 - active range
- 4 - washbasin
- 5 - plastic mounting box with a brass screw-coupling and an electromagnetic valve
- 6 - chromium-plate cover with an integrated electronics

Characteristics:

- SLU 14 - polished finish
- SLU 14X - brushed finish
- function of automatic water stop after 5 minutes of continuous flow
- water is flowing as long as hands are in the active range (max. range to 0,3 m)
- water stops flowing after removal of hands from the active range of sensor after adjustable time delay
- adjustable time delay from 0,25 to 7,75 sec.
- possibility of changing of time delay, active range and switching off by SLD 03
- washbasin tap is destined for cold or premixed water, water temperature is regulated by ball valve
- monitoring of battery capacity (only for models with „B“ index)
- START/STOP program

Technical Specification:

Stainless steel cover dimension	160 x 180 x 3 mm
Mounting box dimension	140 x 140 x 75 mm
Operating voltage	
- SLU 14, SLU 14X	24V DC external battery 9V
- SLU 14B, SLU 14BX	
Power input	
- operating by 24V DC	5 W
- operating by 9V	1,4 W
Active range	
- standard	0 - 0,3 m
- START/STOP program	0,05-0,1 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 3/4"

Supply Specification:

SLU 14	- supply No. 03140	stainless steel cover with an integrated electronics; spout 125 mm; plastic mounting
SLU 14B	- supply No. 03145	box with brass screw-coupling, electromagnetic valve (1 pc.) and ball valve; lithium battery
SLU 14X	- supply No. 64144	SLA 09 (only for models with „B“ index)
SLU 14BX	- supply No. 64145	

Recommended Accessories:

SLZ 01Y	- supply No. 05012	external power supply 230/24V DC for operating of max. 2 pcs. of washbasin taps (page 118)
SLZ 01Z	- supply No. 05011	external power supply 230/24V DC for operating of max. 4 pcs. of washbasin taps (page 118)
SLZ 03	- supply No. 05030	switching power supply 24V DC for operating of max. 9 pcs. of washbasin taps (see page 118)
SLZ 06	- supply No. 05060	external power supply 230/24V DC for operating of max. 1 pc. of washbasin tap (see page 118)
SLD 03	- supply No. 07030	universal remote control for an adjustment of parameters of all products with infra-red electronics (see page 115)
SLT 04	- supply No. 09040	thermostatic valve 3/4", rate of flow 28 l/min by the pressure 0,1 MPa (see page 115)
SLT 05	- supply No. 09050	thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa (see page 115)
SLT 07	- supply No. 09070	thermostatic valve 3/4", rate of flow 43 l/min by the pressure 0,1 MPa (see page 115)
SLT 08	- supply No. 09080	thermostatic valve 1", rate of flow 53 l/min by the pressure 0,1 MPa (see page 115)
SLT 09	- supply No. 09090	thermostatic valve 5/4", rate of flow 82 l/min by the pressure 0,1 MPa (see page 115)
SLT 10	- supply No. 09100	thermostatic valve 6/4", rate of flow 155 l/min by the pressure 0,1 MPa (see page 115)
SLA 09	- supply No. 06090	lithium battery 9V/1200 mAh, type U9VL, battery life approx. 2 years at 100 uses per day (only for models with "B" index) (see page 115)