

Stainless Steel Washbasin Tap with Piezo Button

SLU 31NP, SLU 32NP, SLU 33NP



Characteristics:



- vandal-proof
- designed for prisons
- economical aerator, rate of flow 6 l/min
- SLU 31NP, SLU 31NPB, SLU 31NPD, SLU 31NPDB are destined for cold or premixed water
- SLU 32NP, SLU 32NPB, SLU 32NPD, SLU 32NPDB are destined for cold and hot water, temperature is regulated by mixer
- SLU 33NP, SLU 33NPB, SLU 33NPD, SLU 33NPDB are destined for cold and hot water, temperature is regulated by Allen wrench by mixer
- electromagnetic valve is integrated inside the body of the tap
- water flows after soft push of the piezo button
- adjustable flowing time from 2 to 62 sec., standardly adjusted to 10 sec.
- water could be stopped by follow-up soft push of piezo button
- parameters adjustment by SLD 04 remote control
- water flow could be regulated by angle valve
- monitoring of battery capacity (only for models with „B“ index)
- brushed finish



SLU 31NP



SLU 32NP



SLU 33NP



SLU 31NPD




SLU 32NPD



SLU 33NPD

Dimensions:

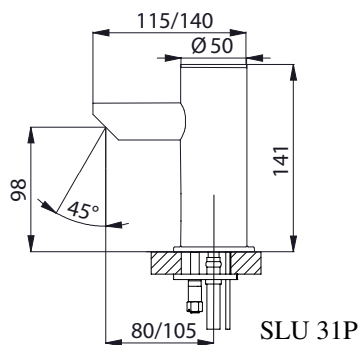

SLU 31P

Technical Specification:

Operating voltage	
SLU 31NP, SLU 32NP, SLU 33NP	24V DC
SLU 31NPD, SLU 32NPD, SLU 33NPD	
SLU 31NPB, SLU 32NPB, SLU 33NPB	6V
SLU 31NPDB, SLU 32NPDB, SLU 33NPDB	
Power input	
- operating voltage 24V DC	3 W
- operating voltage 6V	2 W
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	6 l/min. (inf. data)
Water inlet	male thread G 1/2"

Supply Specification:

SLU 31NP	- supply No. 43319	stainless steel faucet with an integrated electronic and piezo button, electromagnetic valve (1 pc.); connecting hoses; angle valve with non-return valve (1 pc.), battery box with industry velcro for fixation on the wall, included 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (only for models with „B“ index); longer spout (only for models with „D“ index)
SLU 31NPB	- supply No. 64311	
SLU 31NPD	- supply No. 64312	
SLU 31NPDB	- supply No. 64313	
SLU 32NP	- supply No. 43329	stainless steel faucet with an integrated electronic and piezo button, electromagnetic valve (1 pc.); connecting hoses; angle valve with non-return valve (2 pcs.), battery box with industry velcro for fixation on the wall, included 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (only for models with „B“ index); longer spout (only for models with „D“ index)
SLU 32NPB	- supply No. 64321	
SLU 32NPD	- supply No. 64322	
SLU 32NPDB	- supply No. 64323	
SLU 33NP	- supply No. 43339	stainless steel faucet with an integrated electronic and piezo button, electromagnetic valve (1 pc.); connecting hoses; angle valve with non-return valve (2 pcs.), battery box with industry velcro for fixation on the wall, included 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (only for models with „B“ index); longer spout (only for models with „D“ index)
SLU 33NPB	- supply No. 64331	
SLU 33NPD	- supply No. 64332	
SLU 33NPDB	- supply No. 64333	

Recommended Accessories:

SLZ 01Y	- supply No. 05012	external power supply 230/24V DC for operating of max. 2 pcs. of washbasin taps
SLZ 01Z	- supply No. 05011	external power supply 230/24V DC for operating of max. 4 pcs. of washbasin taps
SLZ 03	- supply No. 05030	switched power supply 230/24V DC for operating of max. 9 pcs. of washbasin taps
SLZ 04Y	- supply No. 05041	external power supply 230/24V DC on DIN rail for operating of max. 5 pcs. of washbasin taps
SLZ 04Z	- supply No. 05042	external power supply 230/24V DC on DIN rail for operating of max. 9 pcs. of washbasin taps
SLZ 04X	- supply No. 10049	external power supply 230/24V DC on DIN rail, for operating of max. 15 pcs. of washbasin taps
SLZ 06	- supply No. 05060	external power supply 230/24V DC for operating of max. 1 pc. of washbasin taps
SLD 04	- supply No. 07040	remote control for an adjustment of parameters of radar flushing unit and piezo electronics
SLA 32	- supply No. 06320	faucet body extension 30 mm for SLU 31, 32, 33
SLA 33	- supply No. 06330	faucet body extension 150 mm for SLU 31, 32, 33
SLA 36	- supply No. 06360	set of alkaline batteries, 4 pcs. of 1,5V AA 2700 mAh